

# FLAT CABLE

## UL2468 Rainbow Flat Cable Series


### KLS17-XFC Series

**Product Description**

UL STYLE: 2468  
 Rate temperature : 80°C  
 Rate voltage : 300V  
 Passes UL VW-1 & CSA Standard : C22.2 No. 210.2  
 Flame test : FT1,FT2  
 Solid or stranded ,tinned or bare copper conductor 26~24AWG  
 PVC insulation , comply with ROHS environmental standard  
 Uniform insulation thickness to ensure easy stripping and cutting  
 For general purpose internal wiring of appliance




XVII

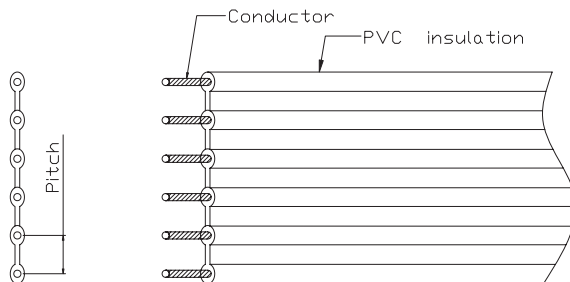

UL Style	Conductor		Pitch mm	Core No.	Insulation Thickness mm	Overall Diameter mm
	AWG	No. /mm				
UL2468 AWM KLS17-XFC	24	7/0.203 and 11/0.160	1.60/1.50	2	0.45	1.5x3.1/3.0
				3		1.5x4.7/4.5
				4		1.5x6.3/6.0
				5		1.5x7.9/7.5
				6		1.5x9.5/9.0
				7		1.5x11.1/10.5
				8		1.5x12.7/12.0
				9		1.5x14.3/13.5
				10		1.5x15.9/15.0
				11		1.5x17.5/16.5
				12		1.5x19.1/18.0

## ORDER INFORMATION

Product NO.: KLS17-XFC-24AWG-XX-XX-X

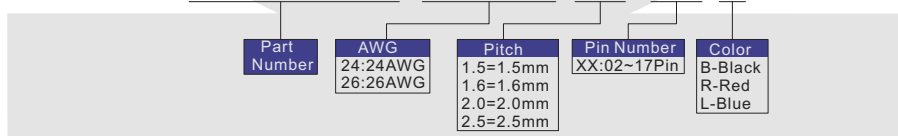


# FLAT CABLE

## UL2468 Rainbow Flat Cable Series

UL Style	Conductor		Pitch mm	Core No.	Insulation Thickness mm	Overall Diameter mm
	AWG	No. /mm				
UL2468 AWM KLS17-XFC	24	7/0.203	2.00	2	0.45	1.5x3.5
				3		1.5x5.5
				4		1.5x7.5
				5		1.5x9.5
				6		1.5x11.5
				7		1.5x13.5
				8		1.5x15.5
				9		1.5x17.5
				10		1.5x19.5
				11		1.5x21.5
				12		1.5x23.5
				13		1.5x25.5
				14		1.5x27.5
				15		1.5x29.5
				16		1.5x31.5
				17		1.5x33.5
				UL2468 AWM KLS17-XFC		24
3	1.5x6.5					
4	1.5x9					
5	1.5x11.5					
6	1.5x14					
7	1.5x16.5					
8	1.5x19					
9	1.5x21.5					
10	1.5x24					
11	1.5x26.5					
12	1.5x29					
13	1.5x31.5					
14	1.5x34					
15	1.5x36.5					
16	1.5x39					
UL2468 AWM KLS18-XFC	26	7/0.158	1.50/1.40		2	
				3	1.4x4.4/4.2	
				4	1.4x5.9/5.0	
				5	1.4x7.4/7.0	
				6	1.4x8.9/8.4	
				7	1.4x10.4/9.8	
				8	1.4x11.9/11.2	
				9	1.4x13.4/12.6	
				10	1.4x14.9/14.0	
				11	1.4x16.4/15.4	
				12	1.4x17.9/16.8	
				13	1.4x19.4/18.2	
				14	1.4x20.9/19.6	
				15	1.4x22.4/21.0	

### ORDER INFORMATION

Product NO.: KLS17-XFC-24AWG-XX-XX-X

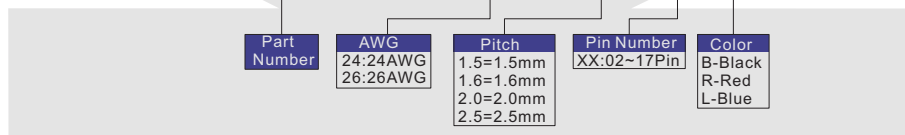

# FLAT CABLE

## UL2468 Rainbow Flat Cable Series

XVII

UL Style	Conductor		Pitch mm	Gore No.	Insulation Thickness mm	Overall Diameter mm
	AWG	No. /mm				
UL2468 AWM KLS18-XFC	26	7/0.158	2.00	2	0.45	1.4x3.4
				3		1.4x5.4
				4		1.4x7.4
				5		1.4x9.4
				6		1.4x11.4
				7		1.4x13.4
				8		1.4x15.4
				9		1.4x17.4
				10		1.4x19.4
				11		1.4x21.4
				12		1.4x23.4
				13		1.4x25.4
				14		1.4x27.4
				15		1.4x29.4
				16		1.4x31.4
				17		1.4x33.4
				UL2468 AWM KLS18-XFC		26
3	1.4x6.4					
4	1.4x8.9					
5	1.4x11.4					
6	1.4x13.9					
7	1.4x16.4					
8	1.4x18.9					
9	1.4x21.4					
10	1.4x23.9					
11	1.4x26.4					
12	1.4x28.9					
13	1.4x31.4					
14	1.4x33.9					
15	1.4x36.4					
16	1.4x38.9					
17	1.4x41.4					

### ORDER INFORMATION

Product NO.: KLS17-XFC-24AWG-XX-XX-X

