

100/1000 Base-Tx Transformer Modules

Electrical Specification:

@25°C Operating Temperature 0 to +70°C

Part NO : 1224K-S005LF
 Trun Ratio (±3%) : TX 1CT:1CT
 RX 1CT:1CT

OCL primary@ 100KHz,0.1Vrms,8mA : 350uH Min

Leakage primary@ 10KHz,0.1Vrms : 0.5uH max

Cww (Pri.:Sec.) : 35pF Max

DCR (Ω): Primary 0.9 Max

Secondary 1.2 Max

Insertion loss: 1-100MHz -1.0dB max

Return loss: 1-30MHz -18dB min

40MHz -16dB min

50MHz -16dB min

60-100MHz -10dB min

DMRR : 1-60MHz -35dB min .


60-100MHz -30dB min .

Crosstalk: 1-100MHz -33dB min .

Isolation Voltage 1500 Vrms Min.




Dimension: unit:mm

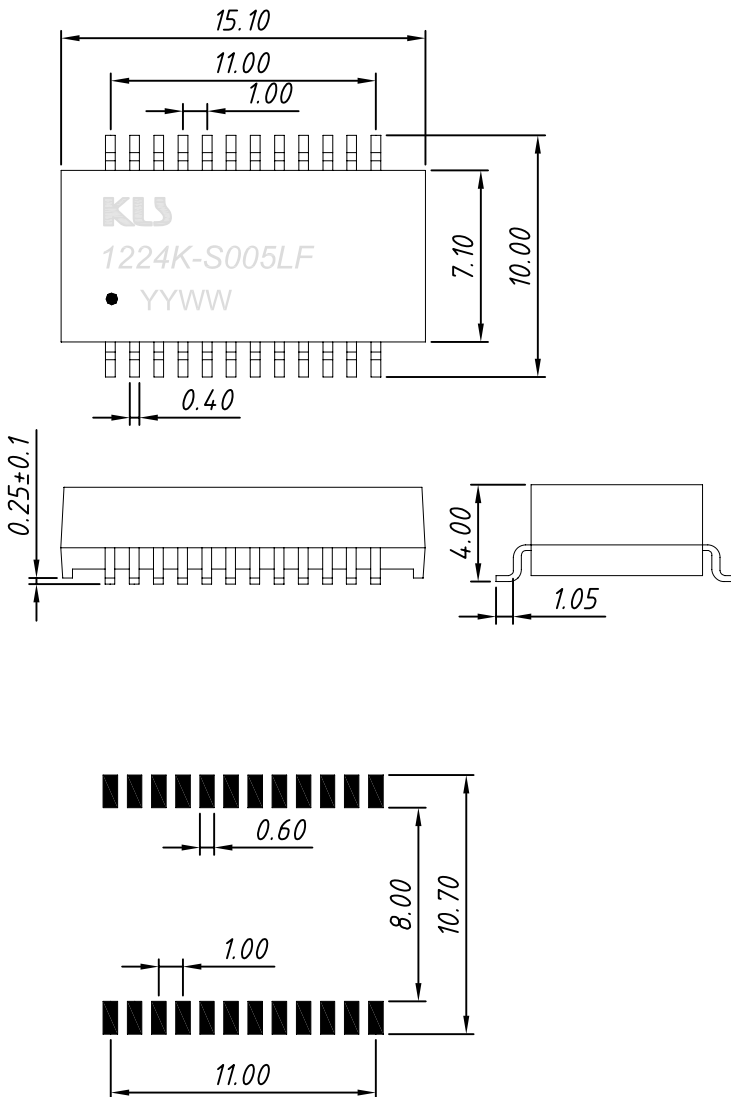

Features:

1. Designed to meet IEEE 802.3 requirements.
2. Operating Humidity:90%RH
3. Storage temperature range:-40~+80°C,90%RH
4. RoHS Compliant

Schematic

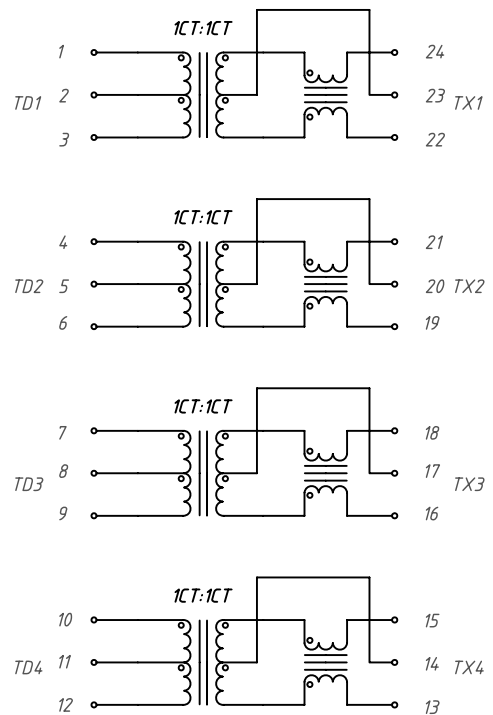

1224K-S005LF-T
 1224K-S005LF-R

Packing: Tube
 Packing: Tape&Reel