

SECTION A-A


Material
 Pin header: Brass, Tin plated
 Housing: LCP, UL94V-0,Black

Electrical
 Rated voltage: 300V
 Rated current: 15A

Contact Resistance: 20 m Ω
 Insulation resistance: 500M Ω /DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +130 °C
 Soldering: 285 °C±5 °C for 10S

Order Information

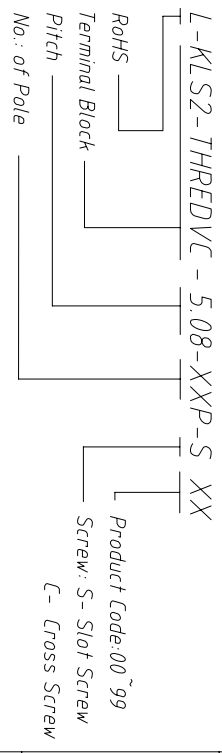

PCB LAYOUT

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X: ±0.60	X: ±0.38	X: ±5°	X: ±3°	UNITS	SHEET SIZE		
XX ±0.25		XX ±2°		mm	A4	Through hole reflow 5.08mm KLS2-THREDDVC-5.08-XXP-S	
					KLS P/N:		
Draw By: Date				2015-09-01			
Check By: Date				2015-09-15			
SCALE		SHEET		OF			

KLS ELECTRONIC CO., LTD.