


SECTION A-A

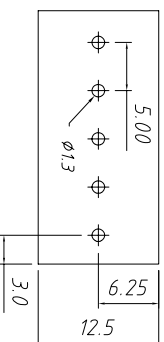


PCB LAYOUT

**Material**  
 Shrapnel: Stainless steel  
 Pin header: Brass, Tin plated  
 Housing: PA66, UL94V-0

**Electrical**  
 Rated voltage: 300V  
 Rated current: 10A  
 Wire range: 26~16AWG 1.5mm<sup>2</sup>  
 Contact Resistance: 20 mΩ  
 Insulation resistance: 500MΩ/DC500V  
 Withstand voltage: AC2000V / 1min

**Mechanical**  
 Temp. Range: -40 °C ~ +105 °C  
 Soldering: 250°C ±5°C for 5S  
 Strip length: 8~9 mm

Order Information

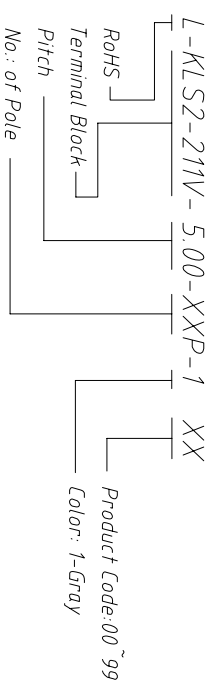

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X: ±0.60	.X ±0.38	.XX ±0.25	X: ±5°	.X ±3°	.XX ±2°	
Draw by: Date	2015-09-01					Spring Clamp Terminal Block 5.00mm
Check by: Date	2015-09-15					
SCALE			SHEET		OF	
KLS ELECTRONIC CO., LTD.						