


Material
 Housing: PA66, UL94V-0
 Pin header: Brass, Tin plated
 Wire guard: Stainless steel

Electrical
 Rated voltage: 300V
 Rated current: 5A
 Wire range: 22~18AWG 1.0mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1 min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Soldering: 250 °C ±5 °C for 5S
 Strip length: 9~10mm

Order Information
 L-KLS2-235R-7.50-XXP-1 XX
 RoHS Terminal Block
 Pitch
 No. of Pole
 Product Code: 00~99
 Color: 1-Gray

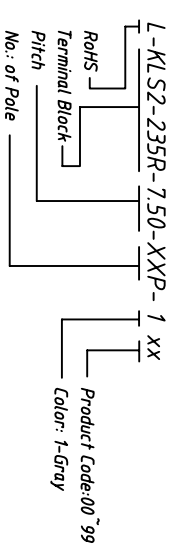

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	SHEET SIZE
X: ±0.60	X: ±5°	XX ±2°	A4
X: ±0.38	X: ±3°		
XX ±0.25			
Draw by 2015-09-01	Check by 2015-09-15	UNITS mm	SCALE

Description: Spring Clamp Terminal Block 7.50mm

KLS P/N: KLS2-235R-7.50-XXP-1

KLS ELECTRONIC CO., LTD.

PCB LAYOUT

1 2 3 4 5 6 7 8