


Material:  
 Standard:PBT  
 Contact: Phosphor Bronze,Au or Sn Over Ni  
 Insulator:Polyester,UL94V-0

Electrical Characteristics:  
 Rated Current:3.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulator Resistance: 1000MΩ Min

Mechanical  
 Operating Temperature: -40° C ~ +105° C  
 Max.Processing Temp:180°C for 30-60 seconde  
 (200°C for 10 seconde)

Order Information

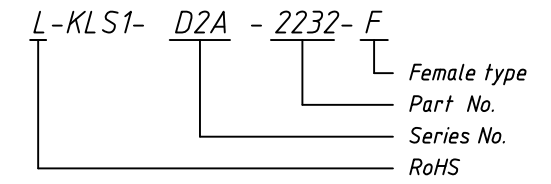

ANGLE TOLERANCE	PROJECTION	Description:	
±2°		Din41612 2232 Female IDC-Type	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
X. ±0.15	SHEET SIZE	A4	L-KLS1-D2A-2232-F
.X ±0.03	Draw:	Daniel	2018-03-10
.XX ±0.05	Check:	Daniel	2018-03-10

