


RoHS compliant

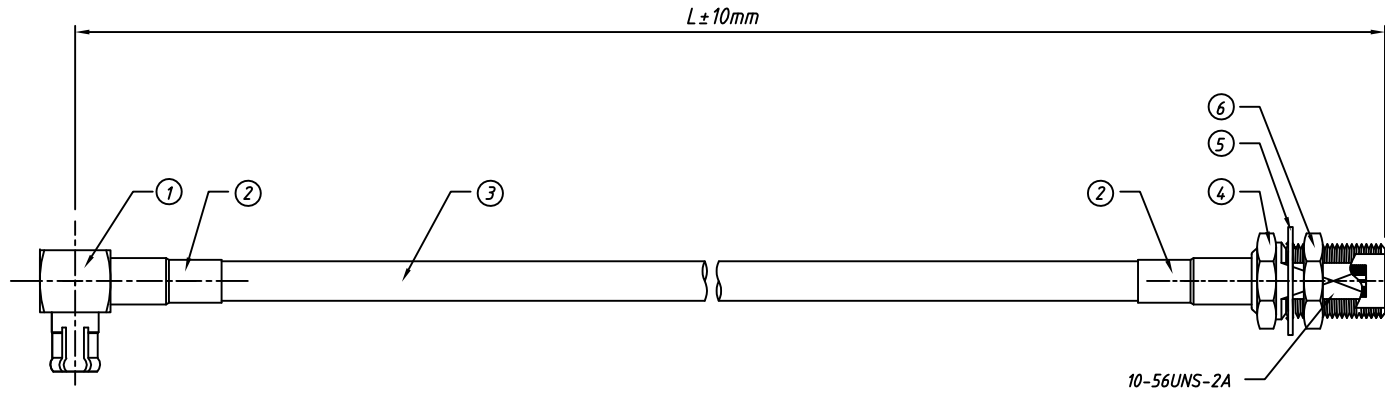


Note:

- 1: V.S.W.R: 1.5(0~3G), Max.
- 2: Wire surface shall have no dirt, broken.
- 3: Connector surface with coating, oxidation phenomenon.
- 4: Connector pins and insulator are in the same plane

Order Information

L- KLS1- RFCA13 - RG316 - L300

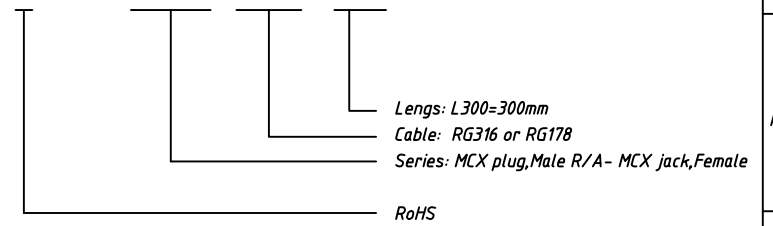

| | | | | |
|-----|------------------|--|-------|------|
| 6 | Nut | T1.5mm Nut, 10-56UNS-2A | PCS | 1 |
| 5 | Washers | T0.5mm Washers | PCS | 1 |
| 4 | Connector | MCX Jack, Female Straight for RG316 or RG178 Cable | PCS | 1 |
| 3 | RF Cable | RG316 or RG178 Cable | mm | L |
| 2 | Heat-Shrink Tube | Ø2.5mm Heat-Shrink Tube, Block, L15mm | PCS | 2 |
| 1 | Connector | MCX plug, Male Right angle, for RG316 or RG178 Cable | PCS | 1 |
| No. | Name | Description | UNITS | Q'ty |

| | | | |
|------------|--------|--------------------------------|---------------------------------|
| | | Description: | |
| | | MCX plug R/A to MCX Jack Cable | |
| PROJECTION | | KLS P/N: | L-KLS1-RFCA13-xxxx |
| UNITS | mm | | |
| SHEET SIZE | A4 | | |
| Draw: | Daniel | 2018-06-26 | NingBo KLS ELECTRONIC CO.,L TD. |
| Check: | Daniel | 2018-06-26 | |