
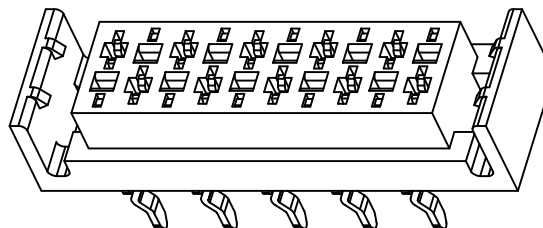





1 RoHS Compliance

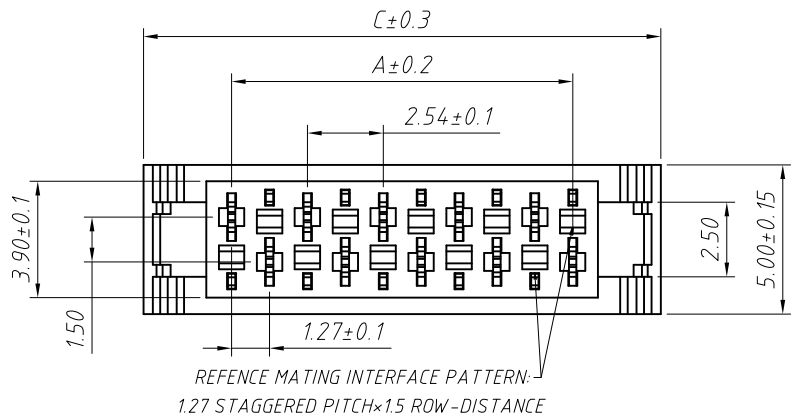

Material:
Housing: PBT Glass Fiber, UL94V-0
Contacts: Phosphor Bronze
Plating: Sn over Ni

Electrical Characteristics:
Current Rating: 1.0 AMP
Contact Resistance: 20m Ohm max.
Insulator Resistance: 1000M Ohm min.
Withstand voltage: 500V AC
Operating Temperature: -40°C ~ +105°C


Poles	DIM.A	DIM.B	DIM.C	Qty/Tube
04	3.81	5.50	9.71	59
06	6.35	8.04	12.25	47
08	8.89	10.58	14.79	39
10	11.43	13.12	17.33	33
12	13.97	15.66	19.87	29
14	16.51	18.20	22.41	25
16	19.05	20.74	24.95	23
18	21.59	23.28	27.49	21
20	24.13	25.82	30.03	19
22	26.67	28.36	32.57	17
24	29.21	30.90	35.11	16
26	31.75	33.44	37.65	15

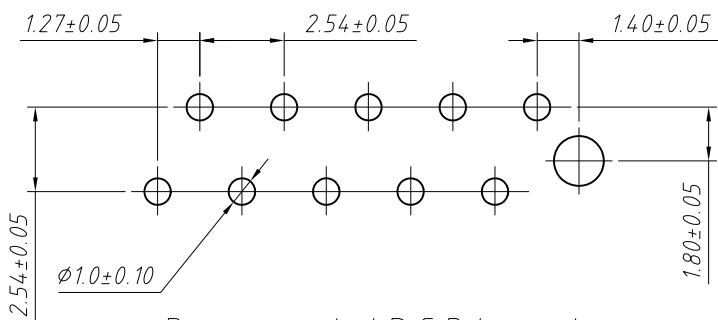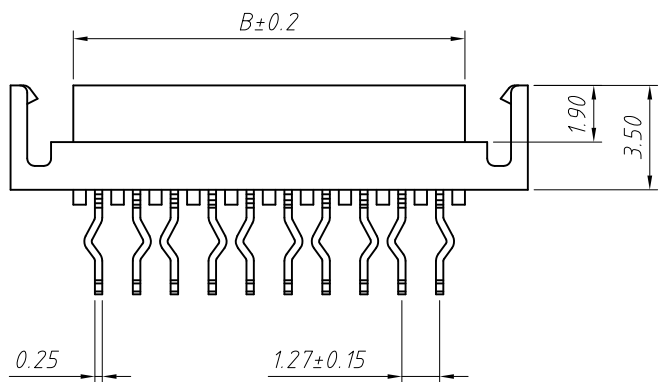

Recommended P.C.B Layout

Order Information:

L-KLS1-204FV-XX-R-□



ANGLE TOLERANCE	PROJECTION	Description:
±3°		Micro-Match Connector, Female, Dip 180, With Lock
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Daniel 2018-07-10
x.xxx ±0.10	Check:	Daniel 2018-07-10



NingBo KLS ELECTRONIC CO., L TD.