






Strip length 9 ~ 10 mm / 0.39 Inch

Electrical data
Rated voltage (II / 2) : 250V / 600V
Rated impulse voltage (II / 2): 4 kV
Rated current:32 A
Legend (ratings):(II / 2)
Overvoltage category:II
Pollution degree:2
Connection data
Connection technology:CAGE CLAMP®
Actuation type:Lever
Connectable conductor materials:Copper
Nominal cross section:2.5 mm²
Solid conductor:0.08 ~ 2.5 mm² / 28 ~ 12 AWG
Stranded conductor:0.08 ~ 2.5 mm² / 28 ~ 12 AWG
Fine-stranded conductor:0.08 ~ 4.0 mm² / 28 ~ 12 AWG
Strip length:9 ~ 10 mm / 0.35 ~ 0.39 Inch
Total number of potentials:1
Type of wiring :Side-entry wiring
Material Data
Color:Gray color
Flammability class per UL 94:V2
Environmental Requirements
Surrounding air (operating) temperature:85 °C

Order Information

L-KLS2-CT2582D-02P
P/N:02P
2582D-Color press handle
2582E-Orange press handle
Model
RoHS

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.50	UNITS	mm	Spring Terminal Block
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		L-KLS2-CT2582D-02P
X. ±5°	Date	2018-03-01	 NingBo KLS ELECTRONIC CO.,L TD.
.X ±3°			
.XX ±2°	SHEET	1 OF 1	

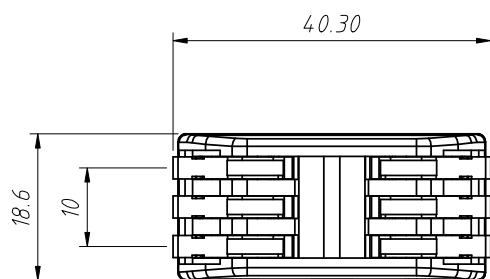

Strip length 9 ~ 10 mm / 0.39 Inch

Electrical data

Rated voltage (II / 2) : 250V / 600V

Rated impulse voltage (II / 2): 4 kV

Rated current:32 A

Legend (ratings):(II / 2)

Overvoltage category:II

Pollution degree:2

Connection data

Connection technology:CAGE CLAMP®

Actuation type:Lever

Connectable conductor materials:Copper

Nominal cross section:2.5 mm²

Solid conductor:0.08 ~ 2.5 mm² / 28 ~ 12 AWG

Stranded conductor:0.08 ~ 2.5 mm² / 28 ~ 12 AWG

Fine-stranded conductor:0.08 ~ 4.0 mm² / 28 ~ 12 AWG

Strip length:9 ~ 10 mm / 0.35 ~ 0.39 Inch

Total number of potentials:1

Type of wiring :Side-entry wiring

Material Data

Color:Gray color

Flammability class per UL 94:V2

Environmental Requirements

Surrounding air (operating) temperature:85 °C

Order Information

L-KLS2-CT2582D-03P

P/N:03P






2582D-Color press handle

2582E-Orange press handle

Model

RoHS

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.50	UNITS	mm	Spring Terminal Block
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS2-CT2582D-03P
X. ±5°	Date	2018-03-01	 NingBo KLS ELECTRONIC CO.,L TD.
.X ±3°			
.XX ±2°	SHEET	1 OF 1	

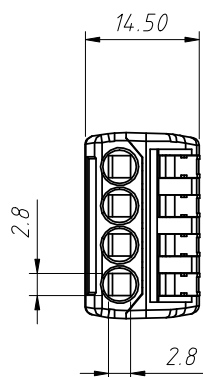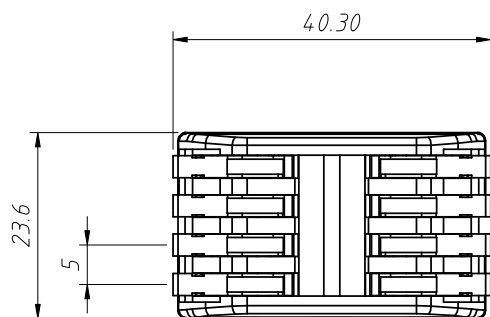


Strip length 9~10 mm / 0.39 Inch




Electrical data
Rated voltage (II / 2) : 250V / 600V
Rated impulse voltage (II / 2): 4 kV
Rated current:32 A
Legend (ratings):(II / 2)
Overvoltage category:II
Pollution degree:2
Connection data
Connection technology:CAGE CLAMP®
Actuation type:Lever
Connectable conductor materials:Copper
Nominal cross section:2.5 mm²
Solid conductor:0.08 ~ 2.5 mm² / 28 ~ 12 AWG
Stranded conductor:0.08 ~ 2.5 mm² / 28 ~ 12 AWG
Fine-stranded conductor:0.08 ~ 4.0 mm² / 28 ~ 12 AWG
Strip length:9~10 mm / 0.35~0.39 Inch
Total number of potentials:1
Type of wiring :Side-entry wiring
Material Data
Color:Gray color
Flammability class per UL 94:V2
Environmental Requirements
Surrounding air (operating) temperature:85 °C

Order Information

L-KLS2-CT2582D-04P

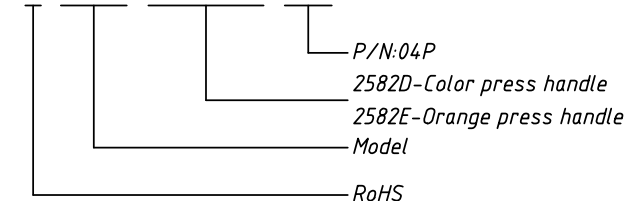

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.50	UNITS	mm	Spring Terminal Block
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS2-CT2582D-04P
X. ±5°	Date	2018-03-01	NingBo KLS ELECTRONIC CO.,L TD.
.X ±3°			
.XX ±2°	SHEET	1 OF 1	

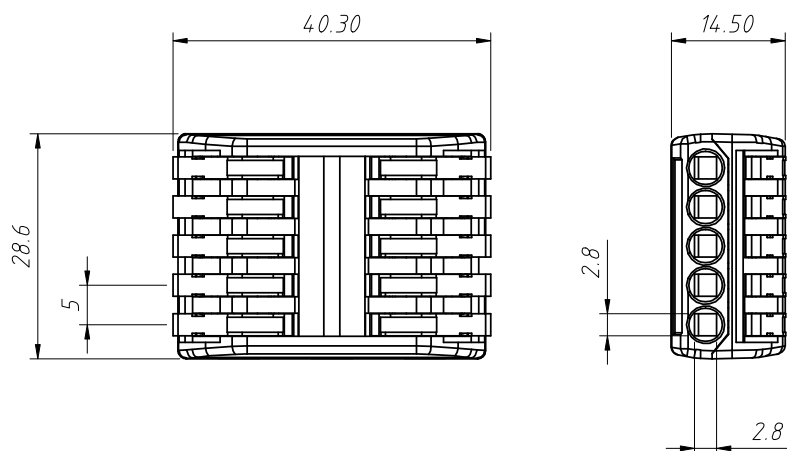


Strip length 9~10 mm / 0.39 Inch

Electrical data
Rated voltage (II / 2) : 250V / 600V
Rated impulse voltage (II / 2): 4 kV
Rated current:32 A
Legend (ratings):(II / 2)
Overvoltage category:II
Pollution degree:2
Connection data
Connection technology:CAGE CLAMP®
Actuation type:Lever
Connectable conductor materials:Copper
Nominal cross section:2.5 mm²
Solid conductor:0.08 ~ 2.5 mm² / 28 ~ 12 AWG
Stranded conductor:0.08 ~ 2.5 mm² / 28 ~ 12 AWG
Fine-stranded conductor:0.08 ~ 4.0 mm² / 28 ~ 12 AWG
Strip length:9~10 mm / 0.35~0.39 Inch
Total number of potentials:1
Type of wiring :Side-entry wiring
Material Data
Color:Gray color
Flammability class per UL 94:V2
Environmental Requirements
Surrounding air (operating) temperature:85 °C

Order Information

L-KLS2-CT2582D-05P

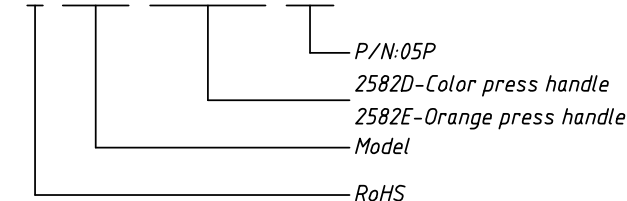

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.50	UNITS	mm	Spring Terminal Block
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS NingBo KLS ELECTRONIC CO.,L TD.
X. ±5°	Date	2018-03-01	
.X ±3°	SHEET	1 OF 1	
.XX ±2°			