



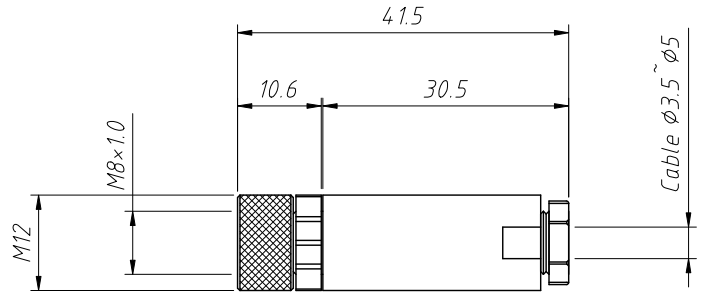



1
RoHS Compliance



L-KLS15-M8A-P203



L-KLS15-M8A-P204



M8 Wire Locking Wrench

Material:

Insulation: PBT/PA, UL 94 V-0, Black.

Connector Pin: Brass, 0.025u" Gold plated

Nut/Screw: Brass, Nickel plating

Electrical Characteristics:

Rated current: 4A

Rated voltage: 03Pin 60V, 04Pin 30V

Contact Resistance: 3mΩ Max

Mechanical properties:

IP rating: IP67


Wire gauge: 20~26AWG / 0.14~0.50mm²

Mechanical characteristics: mating/cycle > 100 cycle

Operating Temperature: -40°C ~ +85°C

Order Information:

L-KLS15-M8A-P2 03

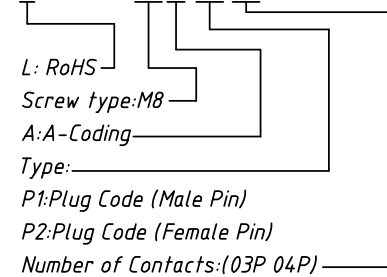

| | | | |
|-------------------|------------|--------------|---|
| ANGLE TOLERANCE | PROJECTION | Description: | M8 IP67 Waterproof circular Plug Female connector |
| ±3° | | | |
| GENERAL TOLERANCE | UNITS | mm | KLS P/N: |
| x.x ±0.30 | SHEET SIZE | A4 | L-KLS15-M8A-P203 |
| x.xx ±0.20 | Draw: | Daniel | 2022-04-01 |
| x.xxx ±0.10 | Check: | Daniel | 2022-04-01 |



NingBo KLS ELECTRONIC CO.,L TD.