


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

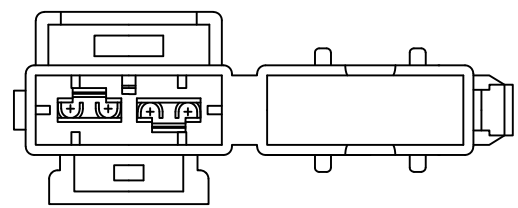


Characteristics:
 Voltage Rating: 32V
 Current Rating: 20A Max.
 Insulation Resistance: 100MΩ Min. at 500VDC
 Dielectric Strength : AC 1000 V Min.at 60s

Fuse type:
 Medium Blade Fuse: KLS5-270-xxx

Order Information:
 L - KLS5 - 714 -XX R xxx

L: RoHS
 Wire AWG: _____
 12- 12AWG for 30A Max.
 14- 14AWG for 20A Max.
 16- 16AWG for 15A Max.
 18- 18AWG for 10A Max.
 20- 20AWG for 5A Max.
 Cable Color: R- Red
 Cable Long: 300-300mm

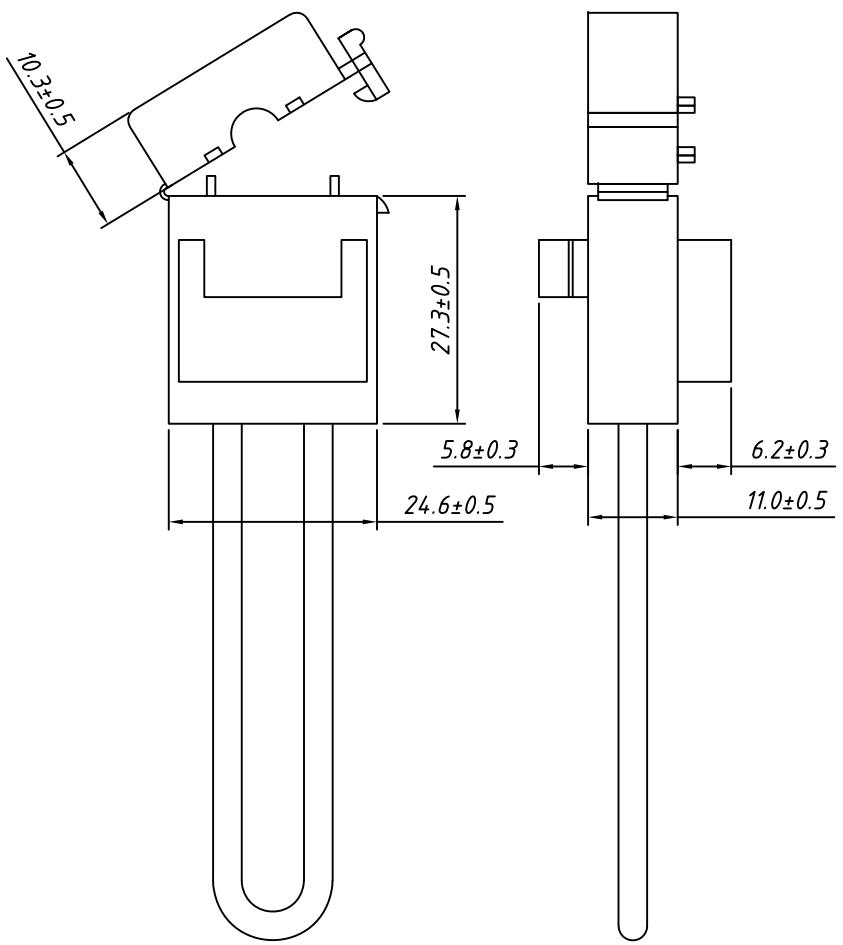

3	Cable	UL1015 PVC Cable 12~20AWG Red,L=300mm	1
2	Terminal	250 Type Female Terminal,Brass T=0.4mm,Tin Plated	2
1	Housing	Housing For Fuse,Nylon,Black	1
Item	P/N	Describe&Material	Q'ty

GENERAL TOLERANCE	PROJECTION		Description:
X. ±1.00	UNITS	mm	Medium Blade Fuse Holder With Cable
.X ±0.50	Draw by:	Daniel	KLS P/N: L-KLS5-714-xxR300
.XX ±0.30	Check by:	Daniel	NingBo KLS ELECTRONIC CO.,L TD.
ANGLE TOLERANCE	Date	2022-09-01	
±5°	SHEET	1 OF 1	

1 2 3 4 5 6 7 8